


CP133

COMPACT TOE CLAMPS

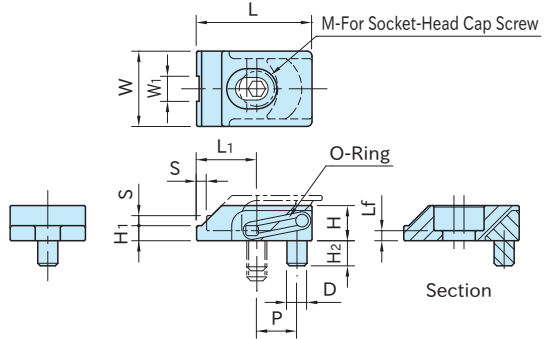


Body	O-Ring
SCM440 steel Black oxide finished HRC33-39	Fluoro rubber

Part Number	S	W	W ₁	H ₁	L ₁	P	D	H ₂	M	Lf	L	H
CP133-04007	2	15	5	3	12	8	4	5	M4	2	23	7
CP133-05009	2.5	19	7	4	14	10	5	6	M5	3	28	9


Part Number	Clamping Force (kN)	Allowable Screw Torque (N·m)	Weight (g)
CP133-04007	2	2.7	13
CP133-05009	3	5.4	27

How To Use

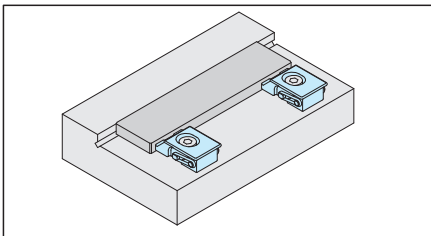


Features

(Jaw moves obliquely downward)



- ① Horizontal pressure against workpiece
- ② Vertical pressure preventing workpiece lift

Mounting-Hole Dimensions



Drill a tapped hole and a locking-pin hole as specified below.

Part Number	M ₁	d (+0.3)	Lf ₁	P ₁
CP133-04007	M4	4	6	8
CP133-05009	M5	5	7	10