

QLSL

STANDARD HANDLES




QLSL
(Screw-In Handles)




QLSL-RL
(Plug-In Handles)




QLSL-RA
(Plug-In-Handle Adaptors)

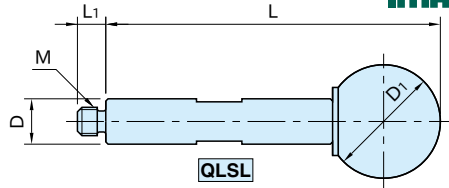

QLSL
(Screw-In Handles)

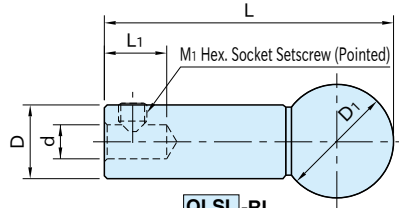

QLSL-RL
(Plug-In Handles)



QLSL-RA
(Plug-In-Handle Adaptors)

Type	Handle	Ball Knob	Shaft
QLSL	SCM435 steel Tempered Black oxide finish	ABS resin Black	—
QLSL-RL	S45C steel Black oxide finish	—	—
QLSL-RA	—	—	SCM435 steel Quenched and tempered Black oxide finish

QLSL (Screw-In Handles)

Part Number	L	D ₁	D	M	L ₁	Weight (g)
QLSL150	59	20	8	M5×0.8	5	25
QLSL200	89	25	10	M6×1	6	50


QLSL-RL (Plug-In Handles)

Part Number	L	D ₁	D	d	L ₁	M ₁	Weight (g)
QLSL150-RL	51	20	13	6	11	M5×0.8-5L	45
QLSL200-RL	79	25	15	8	13	M6×1 -6L	90


QLSL-RA (Plug-In-Handle Adaptors)

Part Number	L	D	L ₂	D ₂	M	L ₁	Weight (g)
QLSL150-RA	8	8	10	6	M5×0.8	5	7
QLSL200-RA	10	10	12	8	M6×1	6	14

How To Use

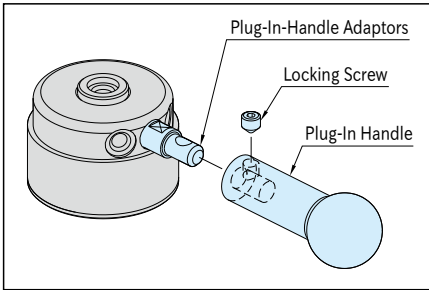

Secure the Plug-In Handle to the Adaptor using the locking screw if necessary.

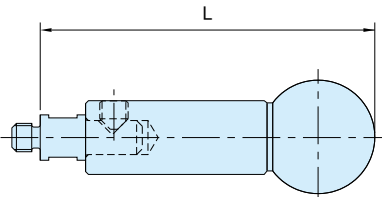

Plug-In Handle Coupled with the Adaptor

■ Proper One-Touch Clamps

- SWING CLAMPS <QLSW>
- PULL CLAMPS <QLPD>
- PUSH CLAMPS <QLPU>

Type	L
QLSL150	59
QLSL200	89