

BJ730


SWIVEL CONTACT BOLTS




(Flat)



(Serrated)



(Flat)



(Serrated)

Type	Body	Ball
BJ730-04006~20032	S45C steel Quenched and tempered(for M4-M8 screw) Black oxide finish	SUJ2 steel Heat treated to HRC56-67
BJ730-06113~20127	SCM435 steel Quenched and tempered	SUJ2 steel Heat treated to HRC50-55


■ Flat

Part Number	M	L	H	d	W	Load Capacity (kN)	Weight (g)
BJ730-04006	M 4×0.7	5	6	4.5	7	5.5	2
BJ730-05008	M 5×0.8	6	8	6	8	9	4
BJ730-06009	M 6×1	7	9	7.4	10	13.7	12
BJ730-08012	M 8×1.25	9	12	10.5	13	25.6	15
BJ730-10016	M10×1.5	11	16	12.7	17	40	45
BJ730-12020	M12×1.75	12	20	15	22	59.4	50
BJ730-16025	M16×2	16	25	20	27	96.4	115
BJ730-20032	M20×2.5	20	30	22	32	100	200

■ Serrated

Part Number	M	L	H (±0.25)	d	W	Load Capacity (kN)	Weight (g)
BJ730-06113	M 6×1	7	13	6.7	13	10	15
BJ730-08113	M 8×1.25	8					20
BJ730-10118	M10×1.5	10	18	10	19	25	35
BJ730-12118	M12×1.75	12					45
BJ730-16127	M16×2	16	27	20	30	90	160
BJ730-20127	M20×2.5	20					180

Application Example

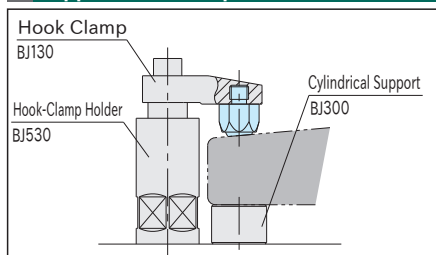

Use to clamp or support a workpiece.

Note

This product is not provided with a ball detent element. For products with a ball detent, see **BUH** Hex-Head Swivel Gripper Screws.